

ECE 571 – Advanced Microprocessor-Based Design Lecture 13

Vince Weaver

`http://www.eece.maine.edu/~vweaver`

`vincent.weaver@maine.edu`

16 October 2014

Prefetching

Try to avoid cache misses by bringing values into the cache before they are needed.

Caches with large blocksize already bring in extra data in advance, but can we do more?



Prefetching Concerns

- When?

We want to bring in data before we need it, but not too early or it wastes space in the cache.

- Where? What part of cache? Dedicated buffer?



Limits of Prefetching

- May kick data out of cache that is useful
- Costs energy, especially if we do not use the data



Implementation Issues

- Which cache level to bring into? (register, L1, L2)
- Faulting, what happens if invalid address
- Non-cachable areas (MTRR, PAT).
Bad to prefetch mem-mapped registers!



Software Prefetching

- ARM has PLD instruction
- PREFETCHW for write (3dnow, Alpha) cache protocol
- Prefetch, evict next (make it LRU) Alpha
- Prefetch a stream (AltiVec)
- Prefetch0, 1, 2 to all cache levels (x86 SSE)
Prefecthnta, non-temporal



Hardware Prefetching – icache

- Bring in two cache lines
- Branch predictor can provide hints, targets
- Bring in both targets of a branch



Hardware Prefetching – dcache

- Bring in next line – on miss bring in N and $N+1$ (or more?)
- Demand – bring in on miss (every other access a miss with linear access)
Tagged – bring in $N+1$ on first access to cache line (no misses with linear access)




Hardware Prefetching – Stride Prefetching

- Stride predictors – like branch predictor, but with load addresses, keep track of stride
- Separate stream buffer?



Stride Predictor

0x10004002: ldb r1,0x0000 0200

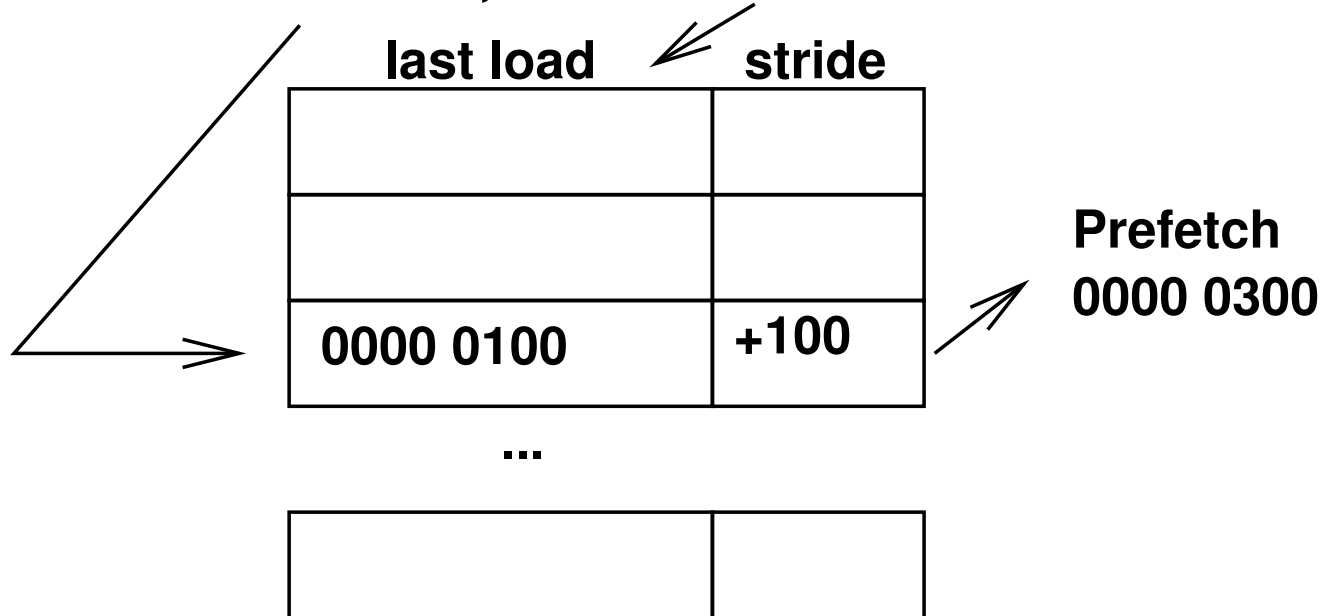

Hardware Prefetching – Correlation/Content-Directed Prefetching

- How to handle things like pointer chasing / linked lists?
- Correlation – records sequence of misses, then when traversing again prefetches in that order
- Content directed – recognize pointers and pre-fetch what they point to



Using 2-bit Counters

- Use 2-bit counter to see if load causing lots of misses, if so automatically treat as streaming load (Rivers)
- Partitioned cache: cache stack, heap, etc, (or little big huge) separately (Lee and Tyson)



Cortex A9 Prefetch

- PLD – prefetch instruction has dedicated instruction unit
- Optional hardware prefetcher. (Disabled on pandaboard)
- Can prefetch 8 data streams, detects ascending and descending with stride of up to 8 cache lines
- Keeps prefetching as long as causing hits
- Stops if: crosses a 4kB page boundary, changes context,



a DSB (barrier) or a PLD instruction executes, or the program does not hit in the prefetched lines.

- PLD requests always take precedence



Investigating Prefetching Using Hardware Performance Counters



Quick Look at Core2 HW Prefetch

- Instruction prefetcher
- L1 Data Cache Unit Prefetcher (streaming).
Ascending data accesses prefetch next line
- L1 Instruction Pointer Strided Prefetcher.
Looks for strided access from particular load instructions.
Forward or Backward up to 2k apart
- L2 Data Prefetch Logic.
Fetches to L2 based on the L1 DCU



x86 SW Prefetch Instructions (AMD)

- `PREFETCHNTA` – SSE1, non temporal (use once)
- `PREFETCHT0` – SSE1, prefetch to all levels
- `PREFETCHT1` – SSE1, prefetch to L2 + higher
- `PREFETCHT2` – SSE1, prefetch to L3 + higher
- `PREFETCH` – AMD 3DNOW! prefetch to L1
- `PREFETCHW` – AMD 3DNOW! prefetch for write



Core2

- SSE_PRE_EXEC:NTA – counts NTA
- SSE_PRE_EXEC:L1 – counts T0
(fxsave+2, fxrstor+5)
- SSE_PRE_EXEC:L2 – counts T1/T2
- Problem: Only 2 counters available on Core2



AMD (Istanbul and Later)

- `PREFETCH_INSTRUCTIONS_DISPATCHED:NTA`
- `PREFETCH_INSTRUCTIONS_DISPATCHED:LOAD`
- `PREFETCH_INSTRUCTIONS_DISPATCHED:STORE`
- These events appear to be speculative, and won't count SW prefetches that conflict with HW prefetches



Atom

- PREFETCH:PREFETCHNTA
- PREFETCH:PREFETCHTO
- PREFETCH:SW_L2
- These events will count SW prefetches, but numbers counted vary in complex ways





Does anyone use SW Prefetch?

- gcc by default disables SW prefetch unless you specify `-fprefetch-loop-arrays`
- icc disables unless you specify `-xsse4.2 -op-prefetch=4`
- glibc has hand-coded SW prefetch in `memcpy()`
- Prefetch can hurt behavior:
 - Can throw out good cache lines,
 - Can bring lines in too soon,
 - Can interfere with the HW prefetcher





SW Prefetch Distribution

SPEC CPU 2000, Core2, gcc -fprefetch-loop-arrays

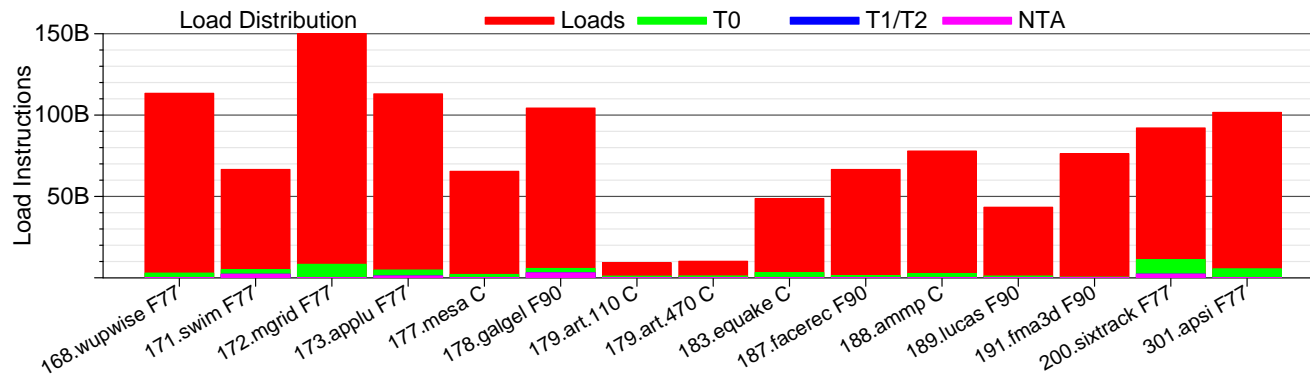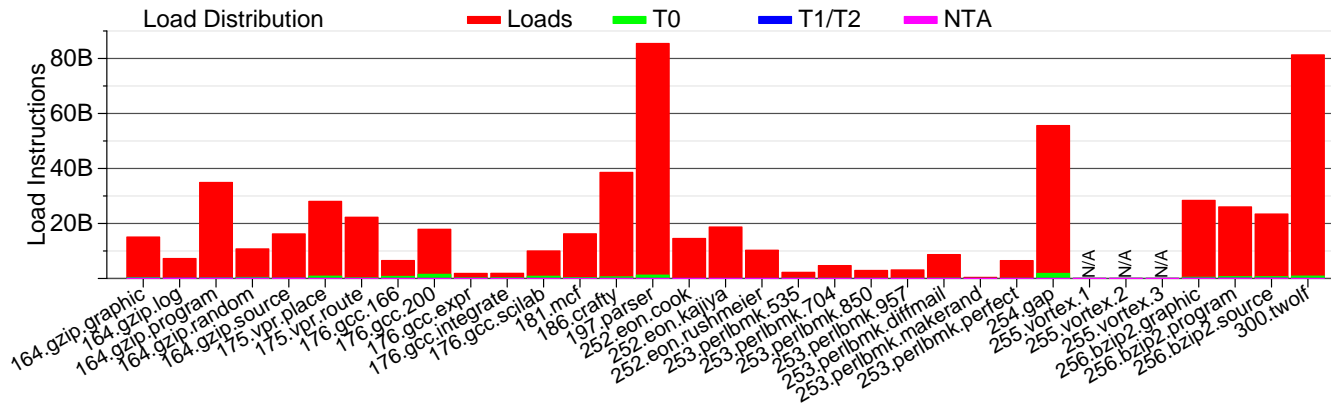

Normalized SW Prefetch Runtime

on Core2 (Smaller is Better)

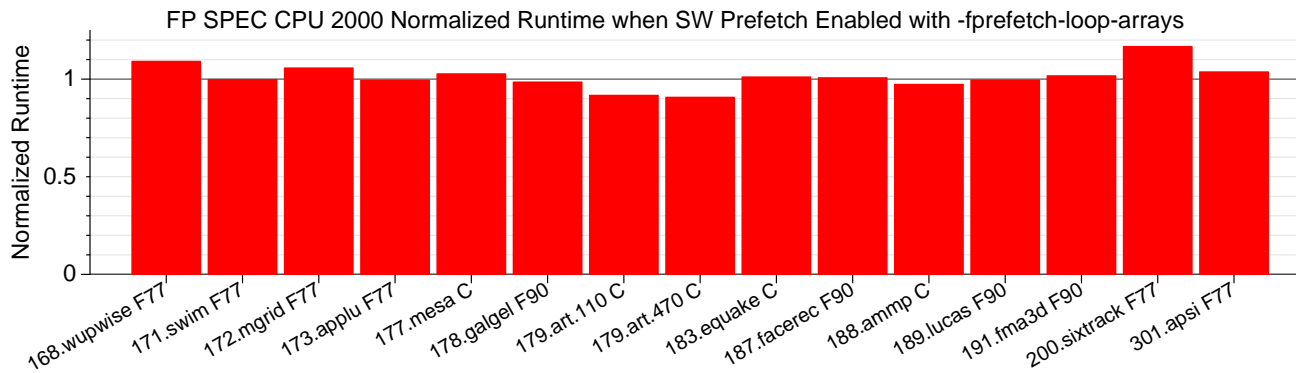
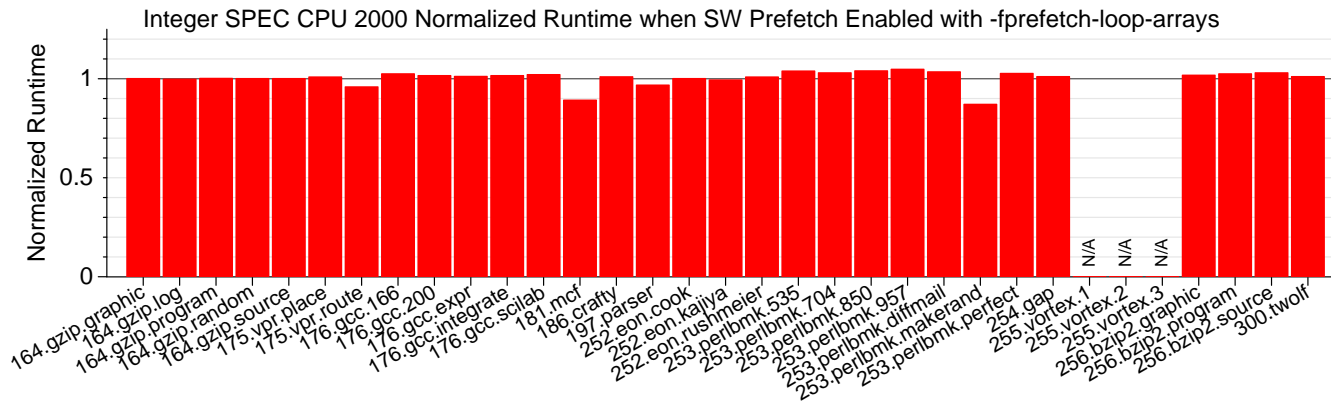


The HW Prefetcher on Core2 can be Disabled



Runtime with HW Prefetcher Disabled

Normalized against Runtime with HW Prefetcher Enabled
on Core2 (Smaller is Better)

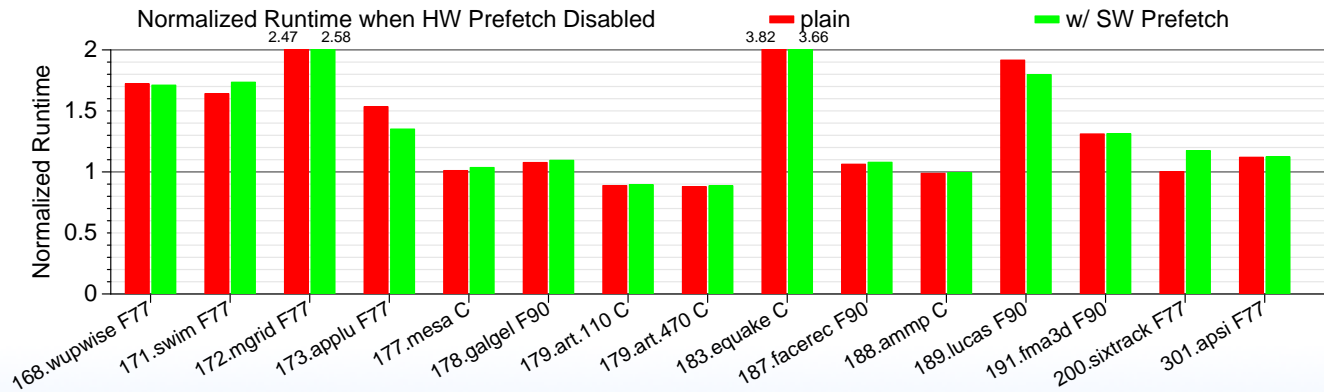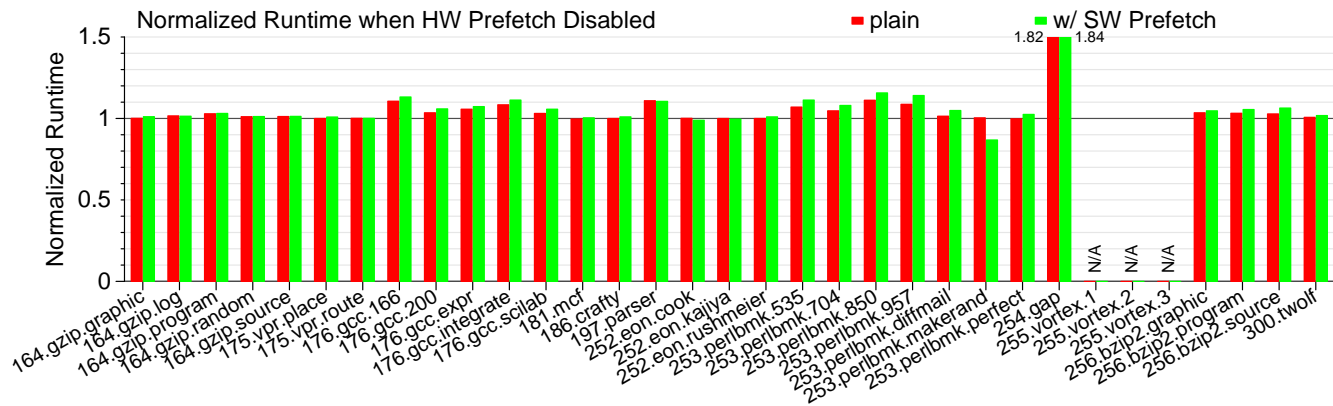

PAPI_PRF_SW Revisited

- Can multiple machines count SW Prefetches?
Yes.
- Does the behavior of the events match expectations?
Not always.
- Would people use the preset?
Maybe.



L1 Data Cache Accesses

```
float array[1000], sum = 0.0;
```

```
PAPI_start_counters(events, 1);
```


```
for(int i=0; i<1000; i++) {  
    sum += array[i];  
}
```

```
PAPI_stop_counters(counts, 1);
```



PAPI_L1_DCA

L1 DCache Accesses normalized against 1000

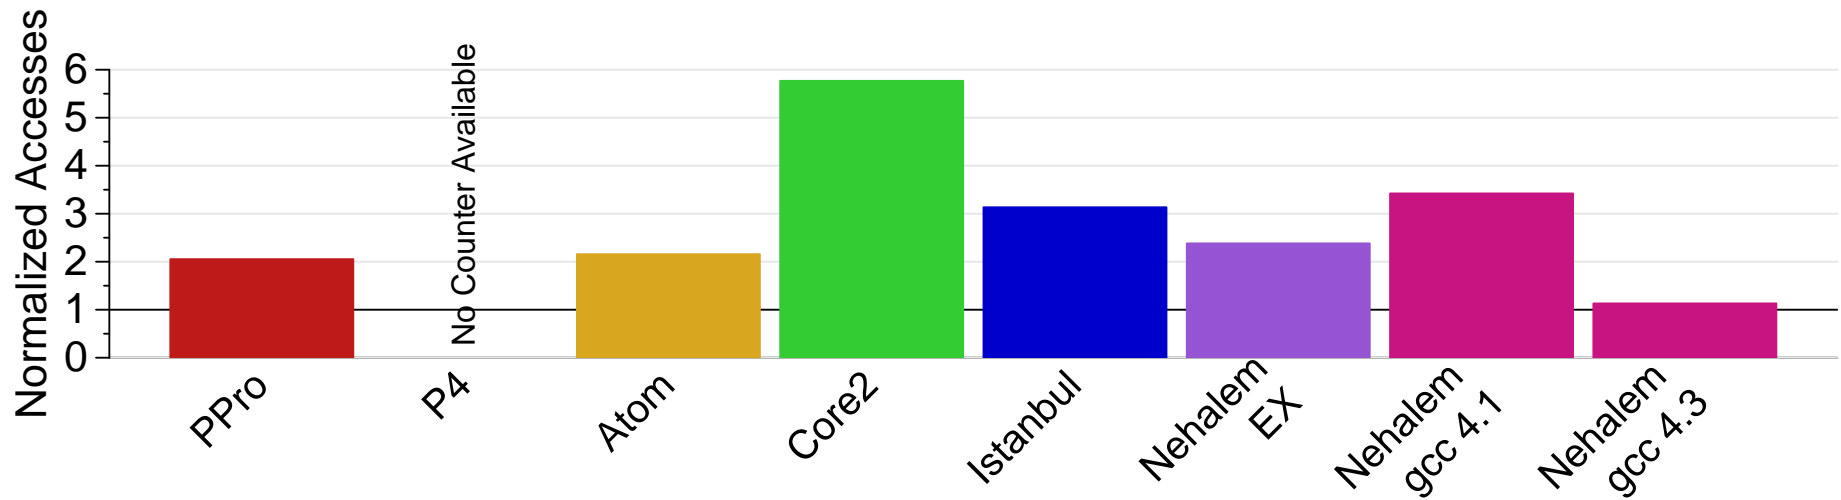

PAPI_L1_DCA

Expected Code

```
* 4020d8:      f3 0f 58 00      addss  (%rax),%xmm0
  4020dc:      48 83 c0 04      add    $0x4,%rax
  4020e0:      48 39 d0          cmp    %rdx,%rax
  4020e3:      75 f3            jne   4020d8 <main+0x328>
```

Unexpected Code

```
* 401e18:      f3 0f 10 44 24 0c  movss  0xc(%rsp),%xmm0
* 401e1e:      f3 0f 58 04 82     addss  (%rdx,%rax,4),%xmm0
  401e23:      48 83 c0 01       add    $0x1,%rax
  401e27:      48 3d e8 03 00 00  cmp    $0x3e8,%rax
* 401e2d:      f3 0f 11 44 24 0c  movss  %xmm0,0xc(%rsp)
  401e33:      75 e3            jne   401e18 <main+0x398>
```




L1 Data Cache Misses

- Allocate array as big as L1 DCache
- Walk through the array byte-by-byte
- Count misses with PAPI_L1_DCM event
- If 32B line size, if linear walk through memory, first time will have 1/32 miss rate or 3.125%. Second time through (if fit in cache) should be 0%.



PAPI_L1_DCM – Forward/Reverse/Random



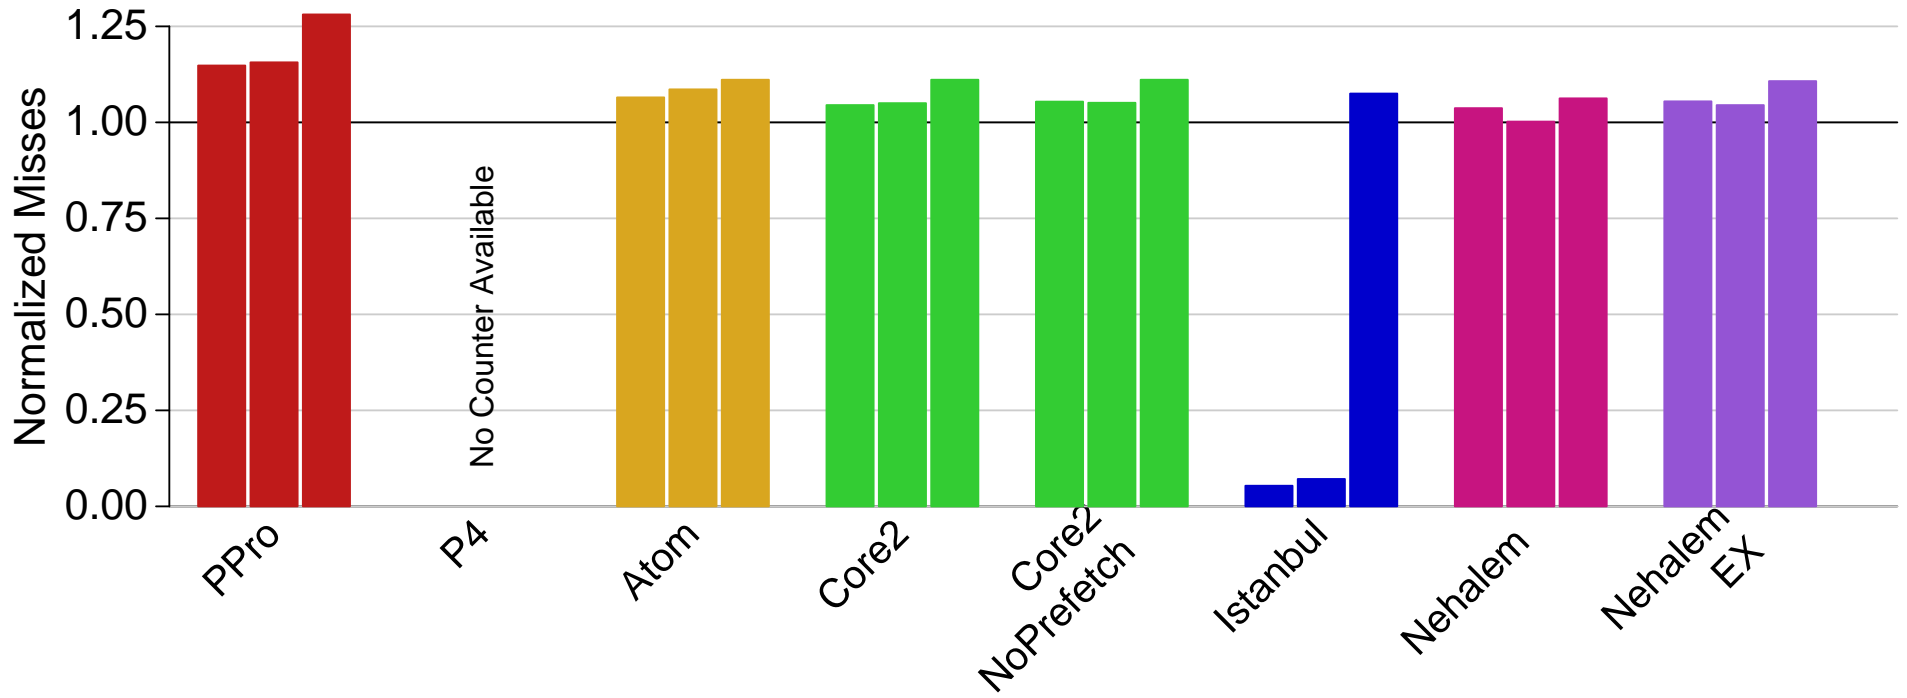

L1D Sources of Divergences

- Hardware Prefetching
- PAPI Measurement Noise
- Operating System Activity
- Non-LRU Cache Replacement




L2 Total Cache Misses

- Allocate array as big as L2 Cache
- Walk through the array byte-by-byte
- Count misses with PAPI_L2_TCM event



PAPI_L2_TCM – Forward/Reverse/Random

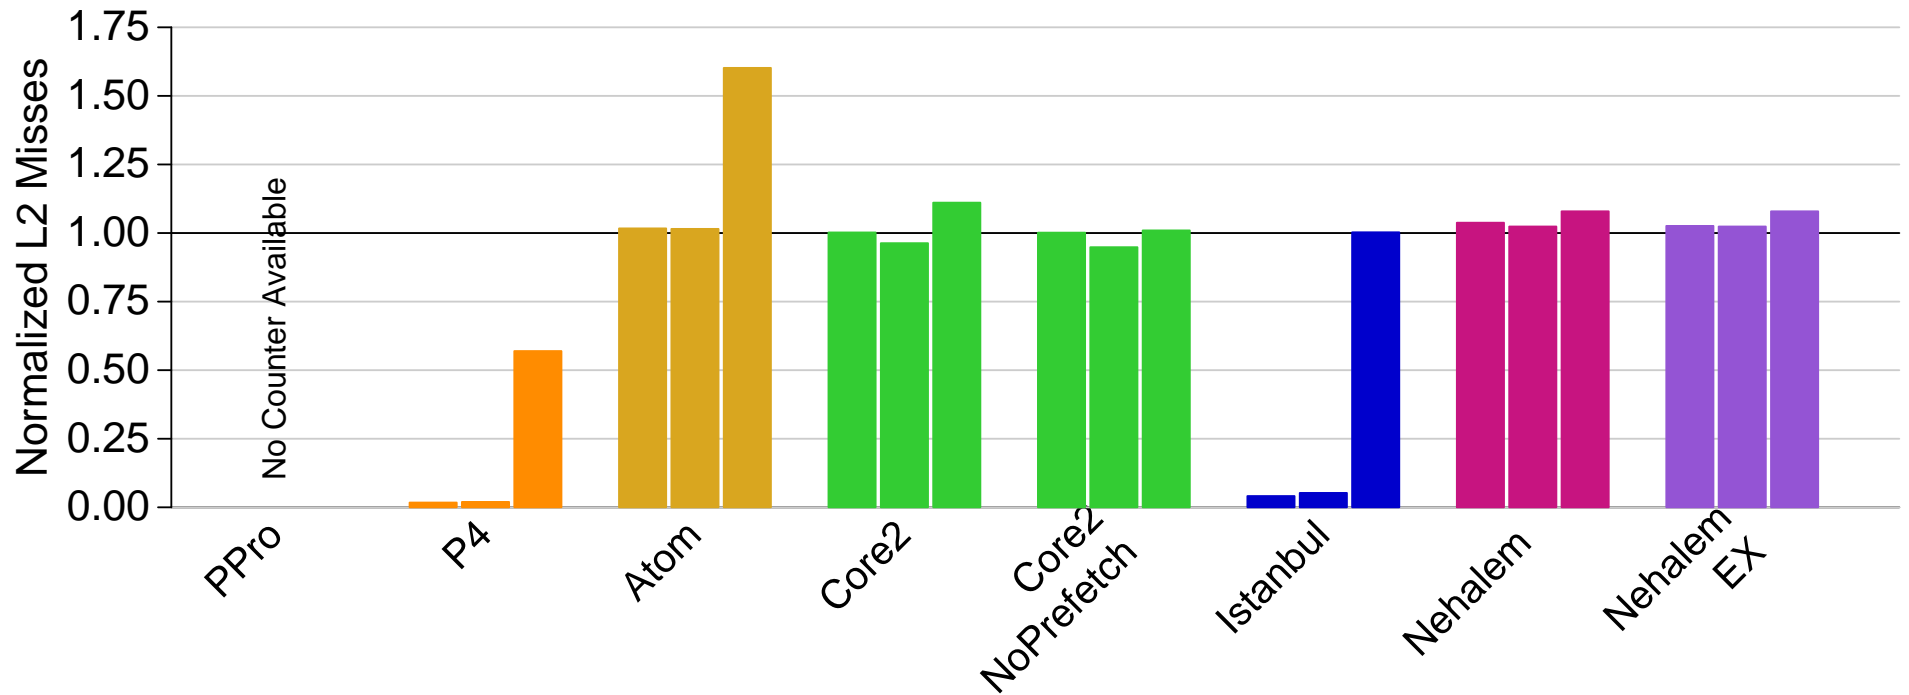

L2 Sources of Divergences

- Hardware Prefetching
- PAPI Measurement Noise
- Operating System Activity
- Non-LRU Cache Replacement
- Cache Coherency Traffic

